
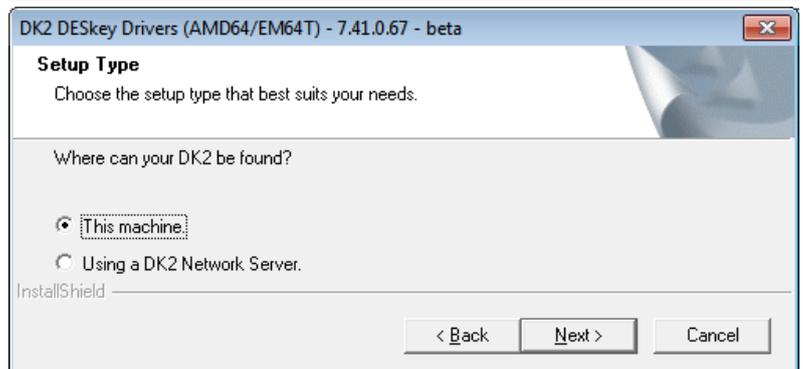
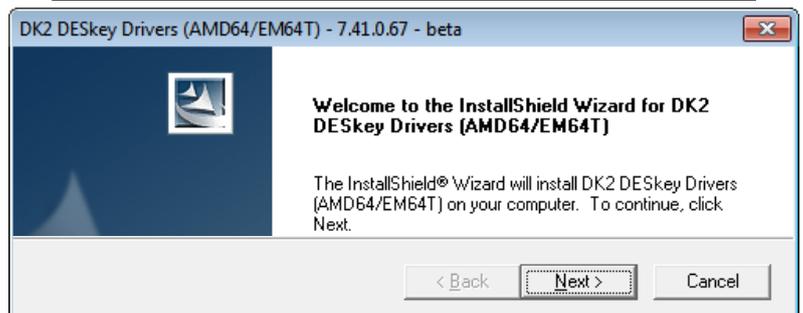
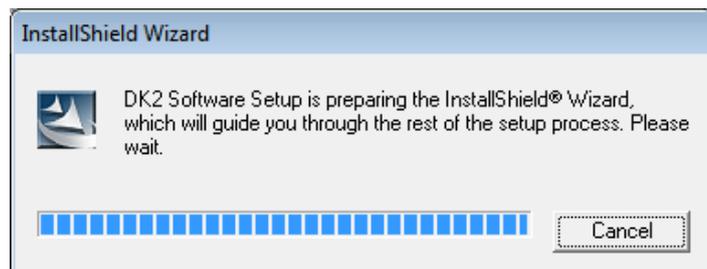


Sonar User Interface¹

The Sonar User Interface software to be run on the customer-furnished laptop/PC is provided on the USB key that's delivered with your Teledyne RESON SeaBat system.

Installation²

- Plug in the USB key, and select the USB in Windows Explorer (if not automatically opened by the system).
- Open the folder Software Installers > Sonar User Interface Installer.
- Double-click the *Sonar UI x.x.x.x-install operator PC.bat* file to install or update the Sonar UI software.
- Follow the instructions from the InstallShield Wizard.
- Click Next to begin the installation of the Sonar UI.
- Select your desired setup.

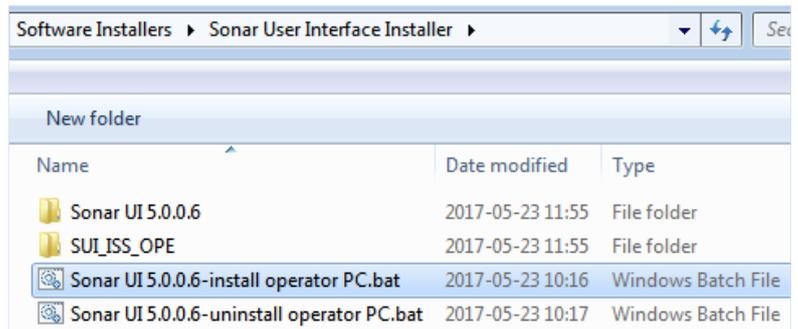

¹ Please observe that the (RESON) Sonar UI may be referred to as SeaBat UI in earlier software releases.


- The installation is progressing.




- Click Install to proceed with the installation.



- Click Finish to complete the installation and exit the InstallShield Wizard.

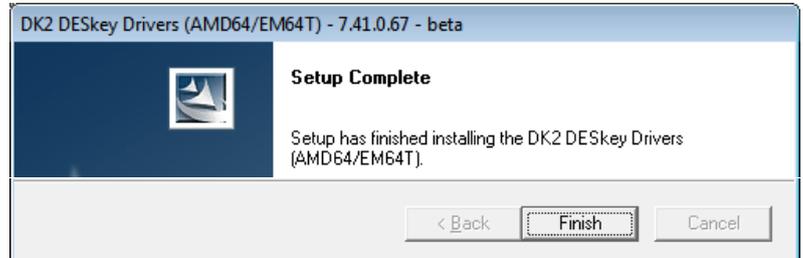

- Press any key to continue.
- Your system is ready for operation.

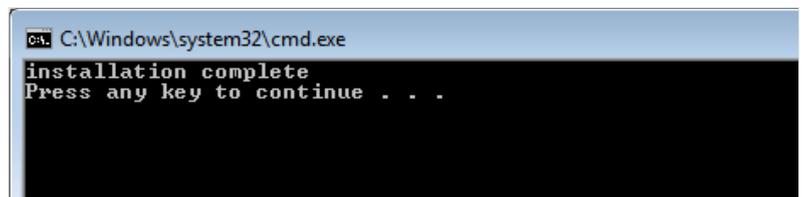

* For information on navigation in the Sonar User Interface, please refer to the Sonar UI User Manual. For information on installation of the SeaBat T-Series sonar system, please refer to the corresponding Operator's Manual or Quick Reference Guide.